

# CROWN 6, 8 AND 12 VOLT HEAVY DUTY DEEP CYCLE BATTERIES



Nobody builds them like Crown. Nobody. Because no one else invests in the heaviest, thickest plates in the industry. Ours are over 10% thicker than our competitors. Combine that with our proprietary PROeye™ and our low-maintenance container – features that make battery maintenance predictable and efficient – and you’ve got a battery that’s going to last longer and perform like no other.



**+ PROeye™**  
No mess, no guess system for inspecting electrolyte levels that signals when watering is required.

**+ Heat-sealed Case and Cover Design**

**+ Rigid Connectors**  
Heavy-duty TTP, COS and Post connectors deliver maximum electrical efficiency and durability.



**+ X-TEND Container Design**  
X-Tend provides more electrolyte above the battery plates so batteries can perform longer between watering intervals, lowering preventive maintenance costs and improving overall ROI on your Crown Battery purchase.

**+ Heavy-Duty Construction**  
Crown deep cycle batteries are the heavyweight of the industry. More weight means more lead, which translates into a battery that will work and last longer.

**+ Posi-Wrap™ Envelope Separators**  
Posi-Wrap Separators reduce maintenance and prevent failure due to short-circuiting and plate shredding, ensuring reliability and durability.

**+ Z<sup>3</sup> Plate Construction**  
Crown’s Z3 design combines three integrated features for superior performance and durability.

- Our signature “Diamond Z” grid architecture
- An inset lug position
- Our revolutionary “LifePlus™” active paste material

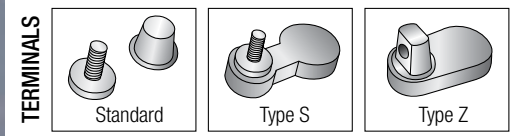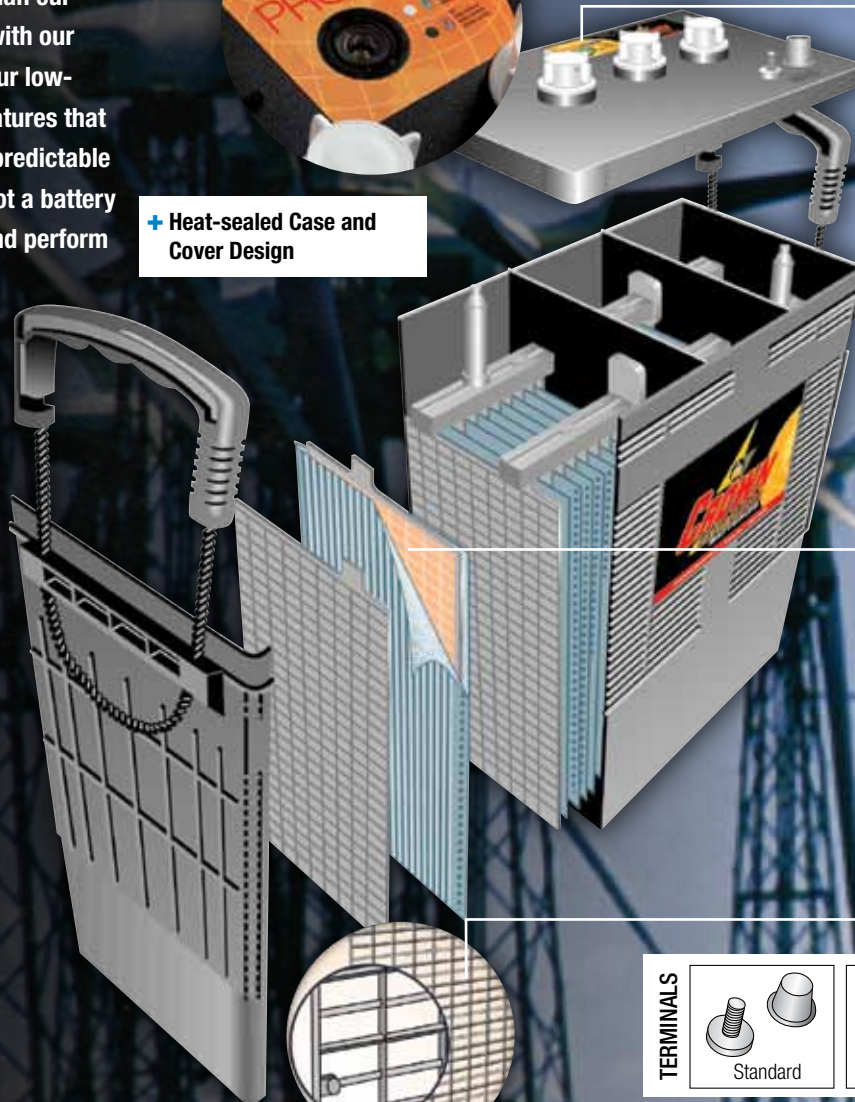

Product Code	Electrical Capacity Ratings				Physical Specifications				
	Voltage (V)	Ampere Hour Capacity			Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	Terminal Type
		20Hr Rate	5 hr rate	RC minutes @ Amps					
CR225	6	225	171	115@75	260	181	267	29	Standard
CR235	6	235	195	125@75	260	181	267	30	Standard
CR245	6	245	209	145@75	260	181	292	33	Standard
CR275	6	275	228	155@75	298	183	286	35	Standard
CR325	6	325	280	196@75	310	183	368	48	Standard
CR395	6	395	320	225@75	310	183	419	55	Standard
CR165	8	165	146	90@75	262	181	283	29	S
CR24DC85	12	85	70	140@25	283	171	238	20	Standard
CR27DC115	12	115	90	170@25	334	171	238	27	Standard
CR31DC130	12	130	105	200@25	334	175	238	30	Standard
CR155	12	155	114	72@75	346	171	311	39	Standard
CR185	12	185	155	95@75	394	178	368	55	Z
CR210	12	210	175	110@75	394	178	368	60	Z